



[www.mobact.gr](http://www.mobact.gr)


Stringline

Ράμμα Καθοδήγησης




# Σύνδεσμοι

- Σύνδεσμος Sonic Ski SL127 (χωρίς βίδες) - δρα ως ελατήριο.
- Σύνδεσμος άμεσης εφαρμογής SL122 (χωρίς βίδες) - δρα ως ελατήριο.
- Σύνδεσμοι με οπές ακριβείας για εφαρμογή κεραίας SL121 & SL123
- Σύνδεσμος επέκτασης κατακόρυφου πασσάλου SL109

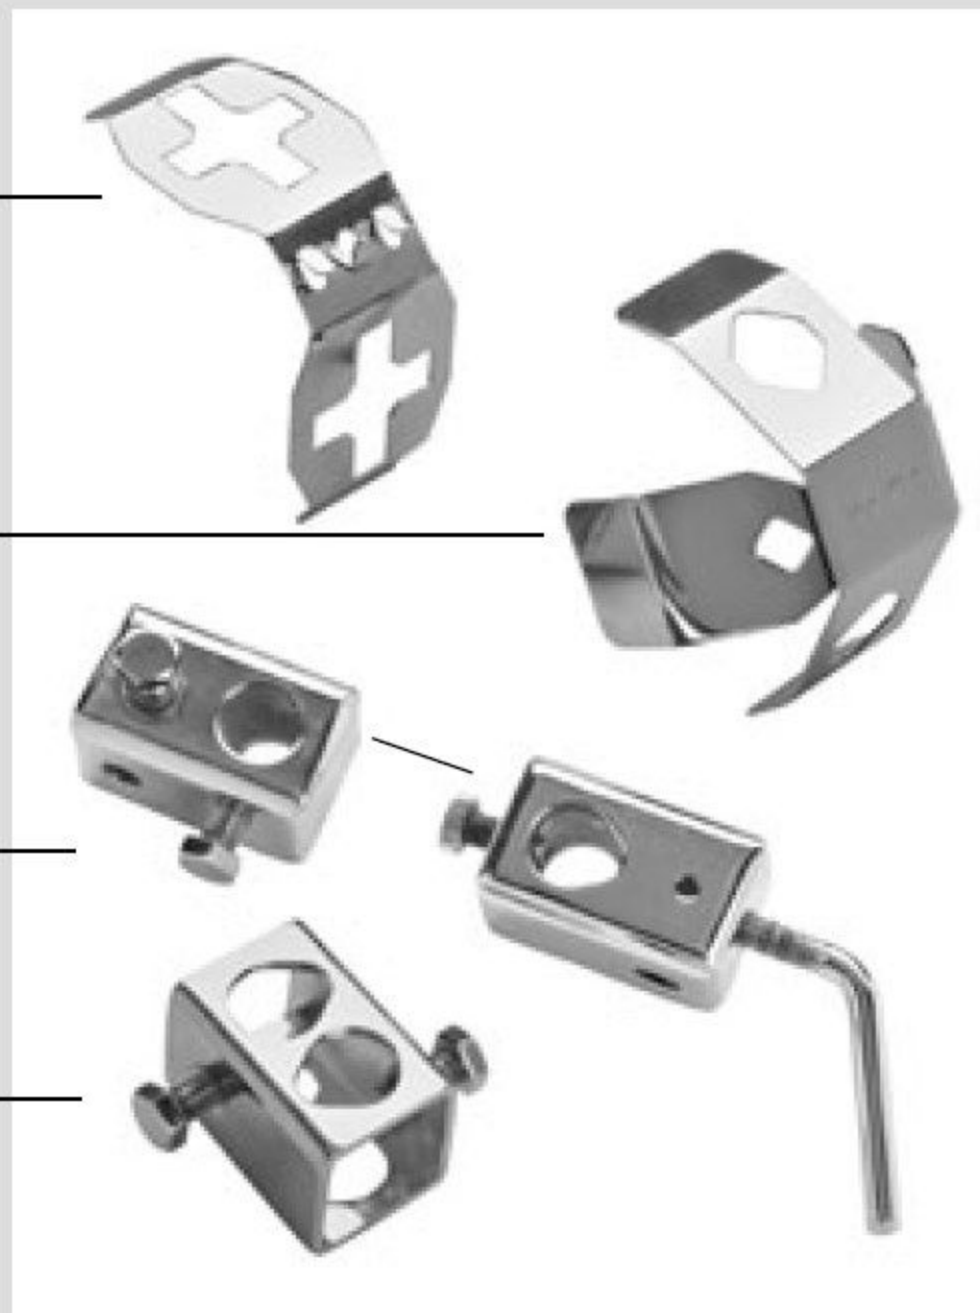




# Κεραία στήριξης Ράμματος

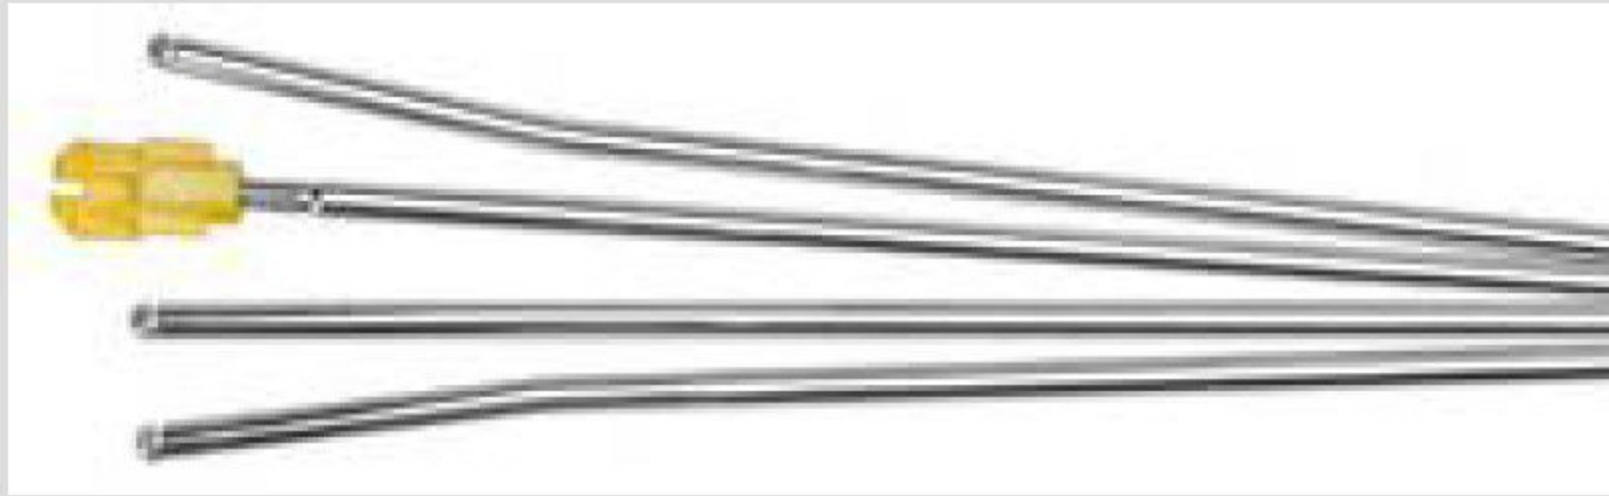

- SL111 – Κεραία με κλίση άκρου προς τα πάνω
- SL112 – Κεραία ευθύγραμμη (με πλαστικό άκρο SL116)
- SL113 – Κεραία ευθύγραμμη
- SL110 – Κεραία με κλίση άκρου προς τα κατω


# Μηχανισμός εφελκυσμού ράμματος

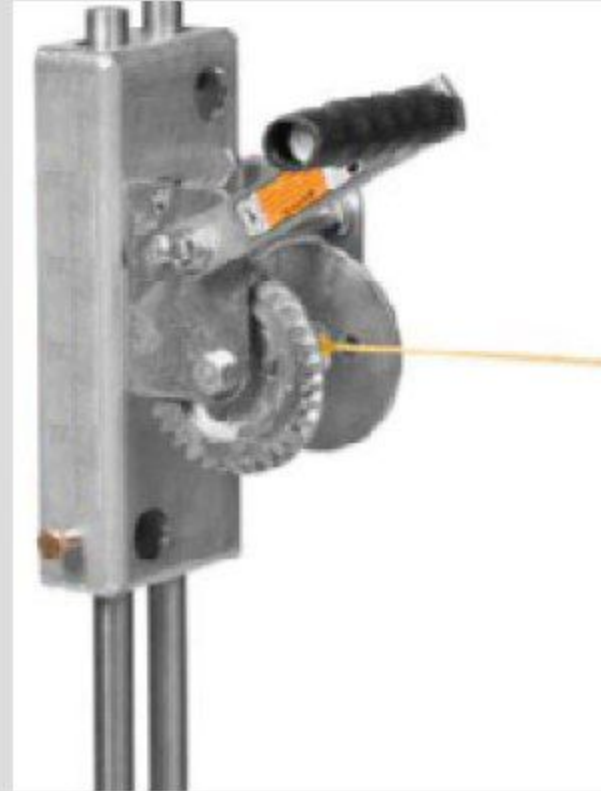

■ SL310

# Προτεινόμενη τοποθέτηση

- 25-30 cm: απόσταση κατακόρυφου πασσάλου από Ράμμα

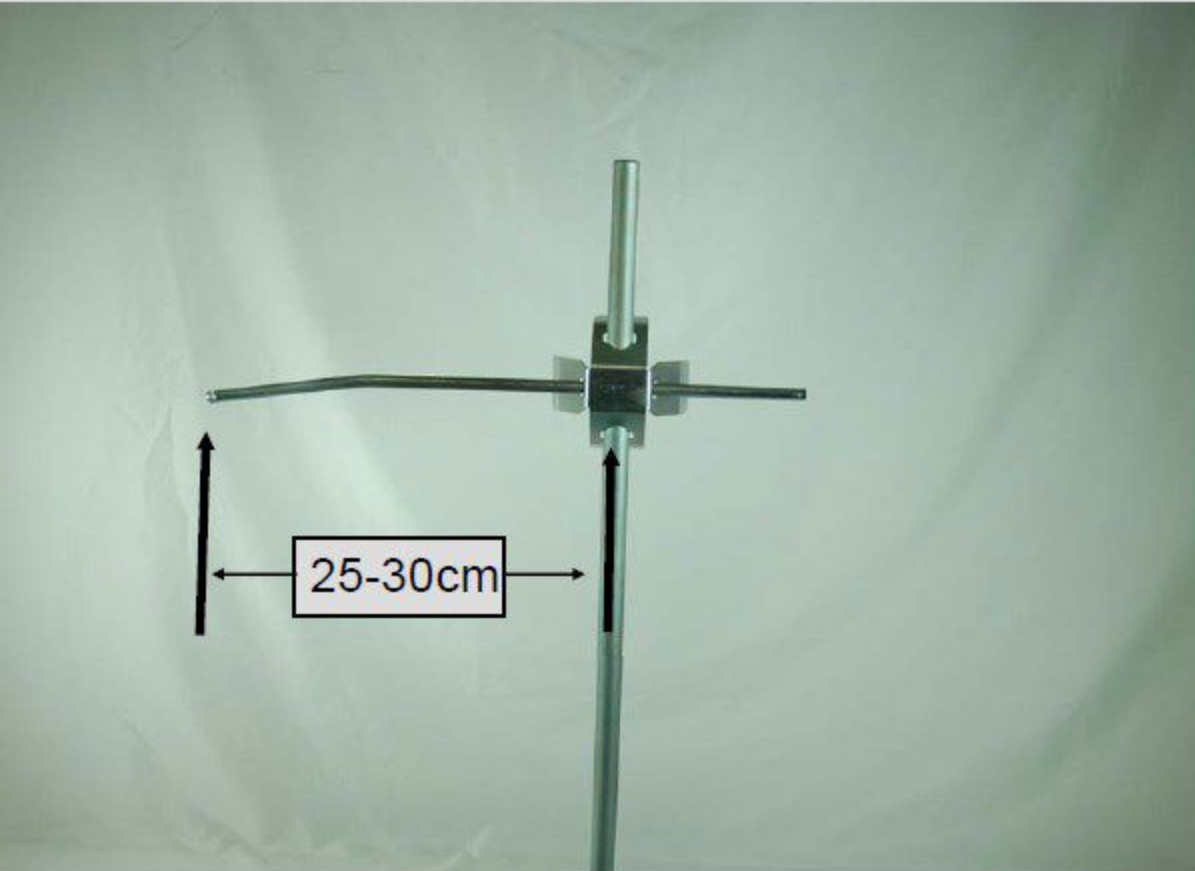



# Τοποθέτηση πασσάλου





## STRINGLINE CLAMPS

### SL121

- Teardrop Shaped Holes
- Independent Clamping
- Corrosion Resistant
- Steelbox Construction
- SL132 Bolts Included



### SL122 *The Original*

- Instajust® Spring Action
- Heat Treated Steel
- Corrosion Resistant
- No Bolts/Wrenches Required
- Pat.#4,309,120



### SL123

- Precision Shaped Holes
- Independent Clamping
- Corrosion Resistant
- Steelbox Construction
- SL132 Bolts Included



### SL127

- For Sonic Grade Control
- Corrosion Resistant
- Clamp Retains Cord
- Heat Treated Steel



### SL109 STAKE EXTENDING CLAMP

- Teardrop Shaped Holes
- Corrosion Resistant
- Steel Construction
- SL132 Bolts Included



### SL100 LINE STAKE

- High Quality Steel
- 3/4" Diameter x 48" Long
- Easy Driving



## STRINGLINE RODS

Detail



### SL110 DOWNWARD BEND

- Cold Drawn Steel
- Corrosion Resistant
- Angled Entry Slot



### SL111 UPWARD BEND

- For All Top Sensing Machines




### SL112 THREADED LINE ROD

- Replaceable Line Tip (SL116) Included
- Cold Drawn Steel
- Corrosion Resistant



### SL113 STRAIGHT LINE ROD

- Cold Drawn Steel
- Corrosion Resistant
- Angled Entry Slot



### SL116

- Self Threads on to SL112
- Durable Nylon
- Replaceable



## BOLTS

### SL130 - L Shaped Bolt 3/8" 16 UNC



### SL132 - Hex Head Bolt - Corrosion Resistant

## FORM PINS

### SL3412 3/4" x 12" Form Pin

### SL3418 3/4" x 18" Form Pin

### SL3424 3/4" x 24" Form Pin

### SL3430 3/4" x 30" Form Pin

### SL3436 3/4" x 36" Form Pin

## STRINGLINE

### SL140-1 STRINGLINE

Diamond Braided Polyester with Core. Available in Blue, Fluorescent Yellow, Orange, or White on 1,000' Spools.



### SL142-1 STRINGLINE

Diamond Braided Polyethylene with Core. Available in Yellow on 1,000' Spools.



### SL141 STRINGLINE

Diamond Braided Polyester with Core. Available in Yellow on 1,000'/3,000'/5,000' Spools



### SL143 STRINGLINE

Diamond braided Polyester with Kevlar core.. Available in Yellow on 1,000'/3,000'/5,000' Spools; and in Blue on 3,000'/5,000' Spools.

## Tension Winch

### SL310 TENSION WINCH

- Zinc Plated
- Corrosion Resistant
- Horizontal or Vertical Mounting
- 600 Pound Rating
- Requires Two SL100 Stringline Stakes



## STRINGLINE KITS

### SL201 100 PC. Kit

- Contains Your Choice of:
- 100 Line Stakes
  - 100 Line Rods
  - 100 Line Clamps with Hardware
  - 2,000 Feet of Stringline

### SL202 200 PC. Kit

- Contains Your Choice of:
- 200 Line Stakes
  - 200 Line Rods
  - 200 Line Clamps with Hardware
  - 5,000 Feet of Stringline

### SL203 Mile Kit *Plus*

- Contains Your Choice of:
- 250 Line Stakes
  - 250 Line Rods
  - 250 Line Clamps with Hardware
  - 6,000 Feet of Stringline
  - 6 SL310 Winches

Kits are a cost saving advantage to purchasing Stringline Components; ideal for a new machine, an additional crew, or a new project.

## NEW! Stringline Stands

*"Line Rod and Clamp not included."*

**SL-STND18** 12lb. base 18" stake

**SL-STND24** 12lb. base 24" stake

When you can't drive a stake in the ground!

For sensing under the machine when pouring barrier wall or bridge parapet.



## RADIUS CLIPS

**SL114** Flatbar Radius Clip



**SL115** 3/8" Rod Radius Clip


**SL117** 3/4" CPVC Radius Clip



**SL118** 3/4" PVC Pipe Radius Clip

**SL119** 1" PVC Pipe Radius Clip

## RADIUS LAYOUT MATERIALS

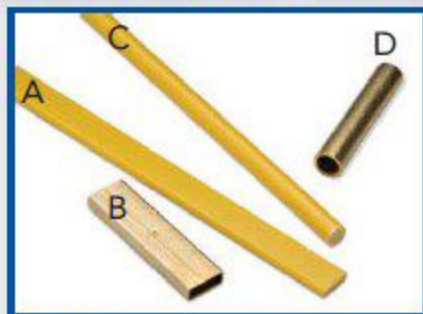

**(A) SL151** Flat Fiberglass Bar 8' 4"

**(A) SL151-2** Flat Fiberglass Bar 16' 8"

- No Thermal Expansion - High Visibility Yellow
- Excellent Flexibility - 8' 4" Lengths
- Durable Fiberglass - 16' 8"

**(B) SL151C** Flat Fiberglass Bar Connector

**(C) SL155** 3/8" - 8' 4" dia Fiberglass Rod

- (C) SL155-2** 16' 8" dia Fiberglass Rod
- No Thermal Expansion - High Visibility Yellow
  - Excellent Flexibility - 8' 4" Lengths
  - Durable Fiberglass - 16' 8"

**(D) SL155C** 3/8" dia Fiberglass Rod Connector